


# New Echotile LVT Dry Back

## Specifications **Glue Down LVT**

Thickness	2.5mm
Wear Layer	0.5mm + U.V Coating
Tile Dimensions	304.8mm x 609.6mm
Tile Per Box / Sq Mt	22 Tiles 4.087 sq mt
Surface Finish	Textured Finish
Installation Method	Approved Adhesive
Warranty	20 Years Domestic / 15 Years Commercial
Application	Domestic & Commercial
Waterproof	100%

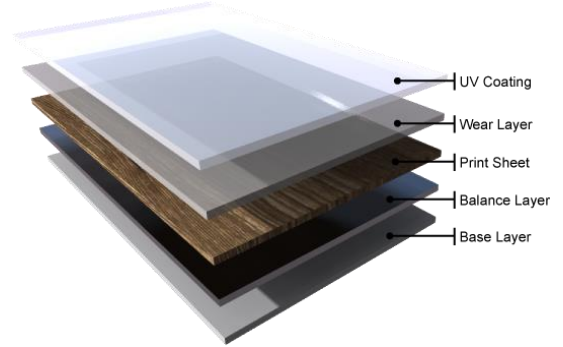

Technical Data	EN Norms	Result	ASTM Norms	Result
<b>Test</b>				
Dimensional Squareness And Straightness	ISO 24342	0.10% Length 0.15% Width	ISO 24342	Pass
Dimensional Stability	ISO 23999	0.05% - 0.11%	ISO23999	Pass
Impact Resistance	EN13329	No Visible Damage	ASTM F2199	Pass
Abrasion Resistance	EN165-11	Pass	ASTM F410	Pass
Scratch Test	EN16094	Pass	ASTM F1914	Pass
Residual Indentation	ISO24343-1	Pass 0.03mm	ASTM F970	Pass
Colour Fastness To Artificial Light	ISO105 B02	Grade 6 Or Better	ASTM F1515	Pass
Slip Resistance	EN 1404	Technical Class DS		
Fire Resistance	EN 14041	BF1-51		
Wear Resistance	EN13329	Pass		
Formaldehyde Emissions	ISO16000-6	Not Detected	ASTM D6007-14	Pass
Recycled Materials	100% Virgin			

## Installation **Glue Down Installation Guide and Maintenance**

<b>Caution</b>	Do not expose to direct sunlight
<b>Installation</b>	Refer to the Wanabiwood website for fitting guide
<b>Cleaning &amp; Maintenance</b>	Only used non solvent based cleaners and a micro fibre mop, avoid excess moisture

**Address:**  
No.2 Charlie Road  
Hughes  
Boksburg  
South Africa

**Contact:**  
**Tel:** +27 (0) 11 028 9498  
+27 (0) 11 028 9499  
**Fax:** +27 (0) 86 543 7413  
**Email:** orders@wanabiwood.co.za