


TURBO LOC XL / XXL

TECHNICAL DATA SHEET OF TURBO LOC XL / XXL

TURBO LOC is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (PUR+), 5mm & 6 mm thickness with a dovetail joint, abrasion group T. Manufactured using a continuous high pressure process. TURBO LOC is reinforced with double fiber glass layers that provides the material with excellent dimensional stability. With a range of designs, it is suitable for high traffic applications: shops, supermarket, fitness center, gym, office, hotel and industrial areas.

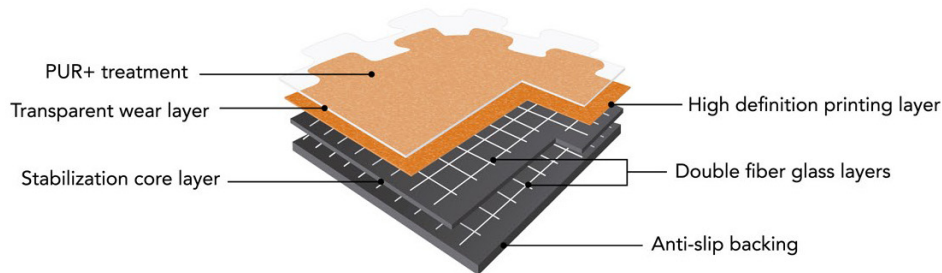

DESCRIPTION			TURBO LOC XL	TURBO LOC XXL
Total Thickness	EN 428	mm	5.0mm	6.0mm
Wearlayer thickness	EN 429	mm	0.5mm	2.0mm
Weight	EN 430	g/m ²	8950g/m ²	9800g/m ²
Size	EN 427	mm	914.4x914.4mm	914.4x914.4mm

CLASSIFICATION

Product Specification	-	-	-	-
Classification	EN 685	class	34-43	34-43
Fire rating	EN 13 501-1 ASTM E648	class	Bfl-S1 Class 1	Bfl-S1 Class 1
Static Electrical propensity	EN 1815	KV	<2	<2
Slip resistance wet	DIN 51130	-	R9	R10

PERFORMANCE

Abrasion group	EN 649	-	Group T	Group T
Dimensional stability	EN 434	%	:50.25	:50.25
Residual indentation	EN 433	mm	:50.10	:50.10
Thermal conductivity	EN 12 524	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	6	6
Chemical resistance	EN 423	-	Good	Good
Castor wheel test	EN 425	-	Suitable	Suitable
Impact sound reduction	EN ISO 717/2	dB	9dB	12dB
Flexibility	EN 435	-	Good	Good
Anti-bacterial and fungicidal	-	-	Good	Good
Surface treatment	-	-	PUR+	PUR+
Underfloor heating	-	·c	Suitable max.28	Suitable max.28